


台式车床

- 1、齿轮变速循环档，刚性强、精度高、耐用、易维护。
- 2、中拖板带T形槽，方便夹持工件，加工特殊部件。
- 3、双面曲线盘式主轴变速机构，12挡位变速，横纵自动走刀。
- 4、车螺纹无需更换挂轮，即可车削多种螺纹，方便、高效。
- 5、双V形淬火导轨，稳定，精度高。
- 6、CE标准的断电护罩，打开保护罩自动断电，安全可靠。

Household desktop small lathe

- 1, gear change cycle, strong rigidity, high precision, durable, easy to maintain.
- 2, the middle drag plate with T-shaped slot, convenient to grip the workpiece, processing special parts.
- 3, double-sided curved disk spindle speed change mechanism, 12 gear change, horizontal and vertical automatic cutting.
- 4. The thread can be turned without replacing the hanging wheel, which is convenient and efficient.
- 5, double V-shaped hardening guide rail, stable, high precision.
- 6, CE standard power protection cover, open the protective cover automatic power off, safe and reliable.

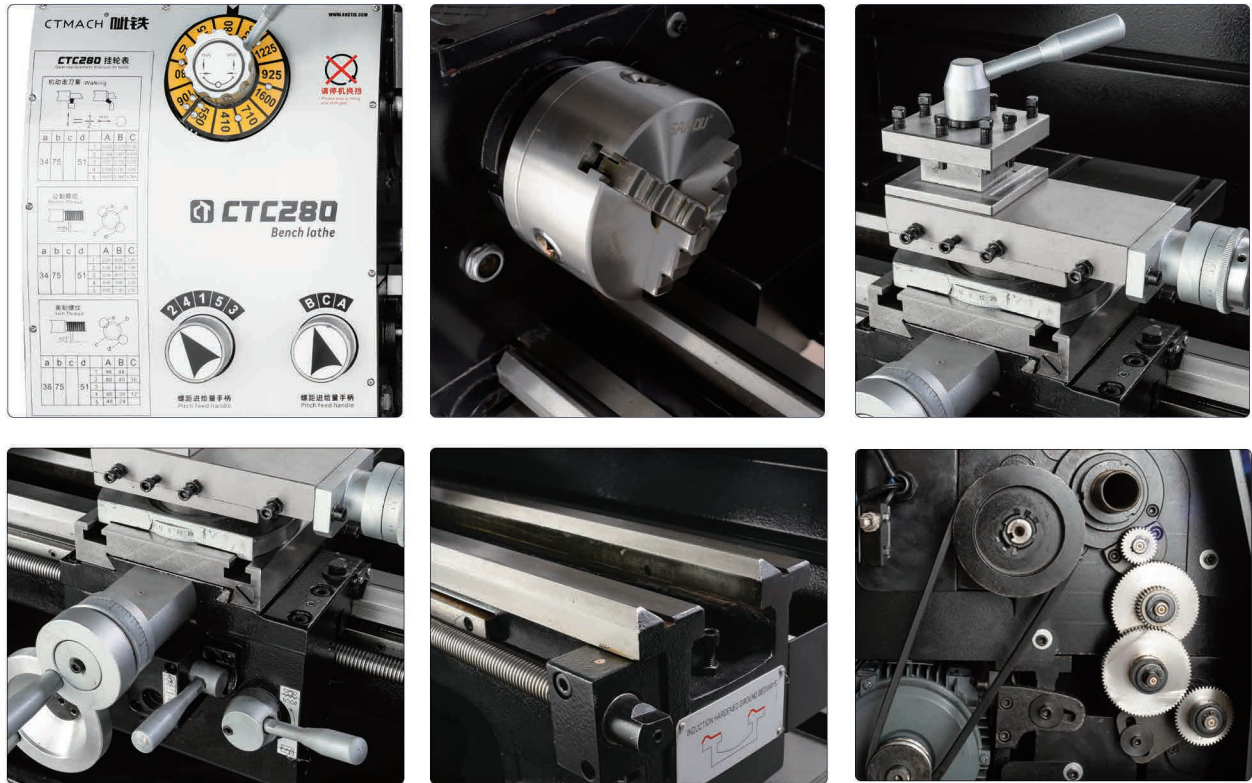

型号	Model	CTC280
床身回转直径	Swing over bed	280mm
中拖板回转直径	Swing over cross slide	160mm
两顶尖距离	Distance between centers	610mm
主轴孔锥度	Spindle taper	MT4
主轴通孔直径	Spindle bore	26mm
尾座套筒行程	Tailstock ram travel	85mm
尾座套筒锥度	Tailstock taper	MT3
中拖板行程	Cross slide travel	130mm
刀架拖板行程	Top slide travel	65mm
公制螺纹	Metric threads	15 0.25~2.5mm
英制螺纹	Inch threads	10 12~96T.P.I
横向往刀量	Range of Corss Feed	0.18~0.182mm
纵向往刀量	Range of Longitudinal Feed	0.36~0.364 mm
主轴转速级数	Number of spindle speeds	12
主轴转速	Spindle speeds	80~1600 RPM
电机功率	Motor power	750w
净重	N.W.	190kg
外形尺寸	Overall dimensions	1100x440x510mm

产品外形尺寸为手工测量，存在较小误差，为正常情况，具体以实物为准。
The dimensions of the product are measured manually, and there is a small error, which is normal, and the actual product shall prevail.