


家用型台式小车床

- 1、整机130kg，占地面积小，应用场所广。
- 2、采用进口SKF轴承，提高使用寿命和精度。
- 3、皮带传动，声音轻，更换皮带位置可获得6挡变速，最低150rpm，最高2000rpm。
- 4、可车正反螺纹，车削螺纹种类多
- 5、双V形淬火导轨，稳定，精度高。
- 6、CE安全标准，齿轮箱保护盖和主轴保护罩采用断电保护装置，停机维修更安全。
- 7、学校、科创中心及科研单位教学演示使用，适合家用DIY，航模零件、钟表零件加工；可加工钛、不锈钢、45号钢、铁、铝、铜等各类有色金属和木材、尼龙等各类软材料。

Household desktop small lathe

- 1. The whole machine weighs 130kg, occupies a small area, and has a wide range of applications.
- 2. Use imported SKF bearings to improve service life and accuracy.
- 3. Belt drive, light sound, 6-speed transmission can be obtained by changing the belt position, minimum 150rpm, maximum 2000rpm.
- 4. Positive and reverse threads can be turned, and there are many types of turning threads.
- 5. Double V-shaped quenching guide rail, stable and high precision.
- 6. CE safety standard, gearbox protective cover and spindle protective cover adopt power-off protection devices, making shutdown maintenance safer.
- 7. Used for teaching demonstrations in schools, science and technology innovation centers and scientific research units. Suitable for household DIY, processing of aircraft model parts and watch parts; can process titanium, stainless steel, No. 45 steel, iron, aluminum, copper and other non-ferrous metals, wood, nylon, etc. All kinds of soft materials.

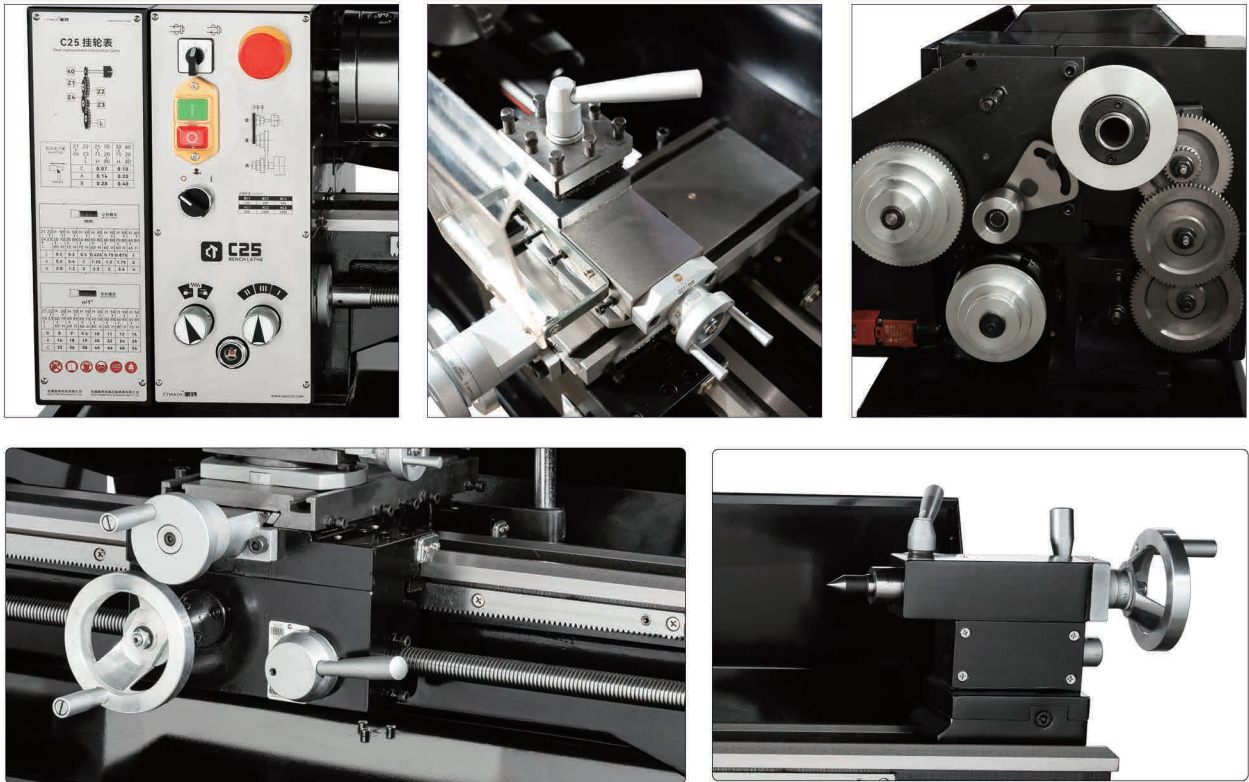

型号	Model	C25
床身回转直径	Swing over bed	250mm
中拖板回转直径	Swing over cross slide	150mm
两顶尖距离	Distance between centers	550mm
主轴孔锥度	Spindle taper	MT4
主轴通孔直径	Spindle bore	26mm
尾座套筒行程	Tailstock ram travel	65mm
尾座套筒锥度	Tailstock taper	MT2
中拖板行程	Cross slide travel	110mm
刀架托板行程	Top slide travel	70mm
公制螺纹	Metric threads	21 0.2~4.0mm
英制螺纹	Inch threads	21 8~56TPI
纵向进给量	Longitudinal feeds	6 0.07~0.40 mm/r
主轴转速	Spindle speeds	6 150~2000 r/min
电机功率	Motor power	750w
净重	N.W.	130kg
外形尺寸	Overall dimensions	1250x585x475mm

产品外形尺寸为手工测量，存在较小误差，为正常情况，具体以实物为准。  
The dimensions of the product are measured manually, and there is a small error, which is normal, and the actual product shall prevail.