

家用重型钻铣床

Home heavy duty drilling and milling machine

高精度稳定铣削  
高强度轻松钻孔


**SKF** 采用进口SKF轴承，提高使用寿命和精度。

主轴箱头可升降，可左右倾斜45°。  
三轴采用燕尾导轨，配可调节锥度镶条，耐磨损，可重载面接触、刚性好。  
主轴6挡齿轮变速，最高可达到1420RPM。

High-precision and stable milling  
High strength and easy drilling  
Imported SKF bearings are used to improve service life and accuracy.  
The head of the spindle head can be raised and lowered, and can be tilted 45° left and right  
The three-axis adopts dovetail guide rail with adjustable taper inserts, which is wear-resistant, can be heavy-loaded, and has good surface contact and rigidity.  
The main shaft has 6-speed gear shifting, which can reach up to 1420RPM.



广泛用于工厂、维修店铺、学校、科创中心及科研单位教学演示使用，适合家用DIY，航模零件、钟表零件加工；  
可加工钛、不锈钢、45号钢、铁、铝、铜等各类有色金属和木材、尼龙等各类软材料。  
Widely used in factories, maintenance shops, schools, science and technology innovation centers and scientific research units teaching demonstration use, suitable for household DIY, model airplane parts, clock parts processing;  
Can process titanium, stainless steel, 45 steel, iron, aluminum, copper and other non-ferrous metals and wood, nylon and other soft materials.

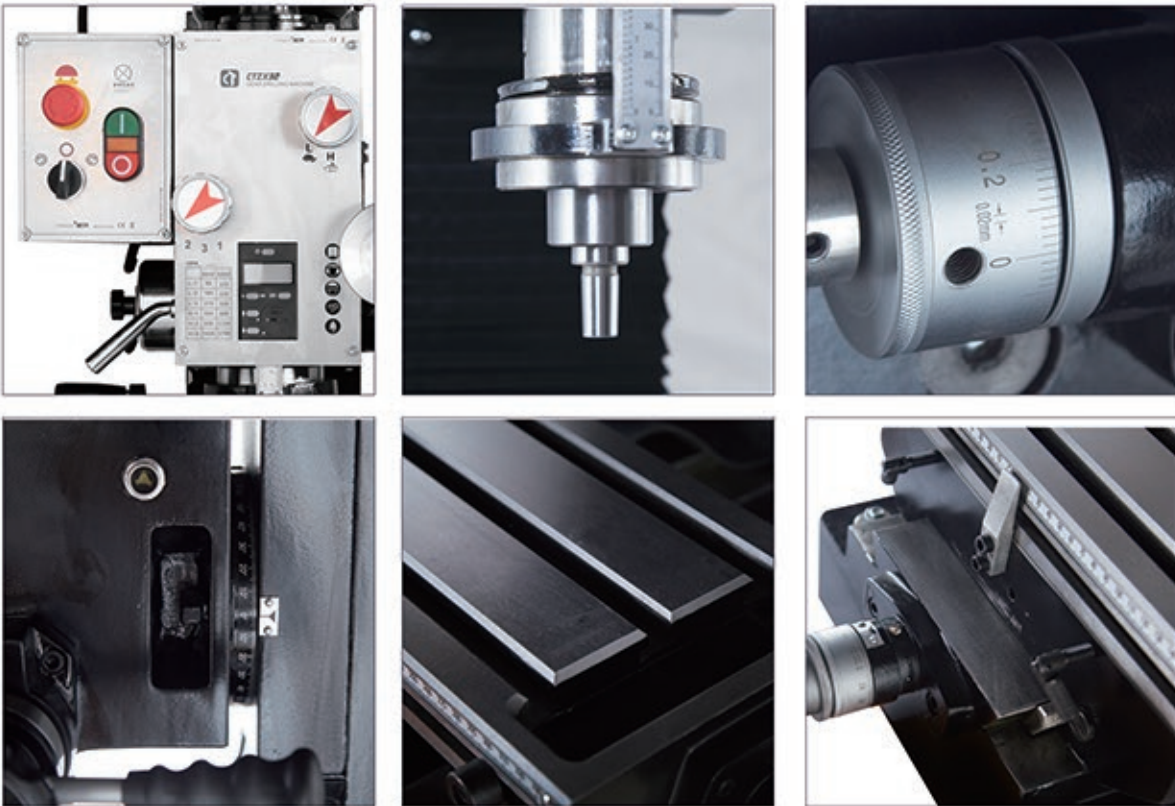

型号	Model	CTZX32
最大钻孔直径	Drilling diameter	32mm
最大面铣能力	Face milling capacity	63mm
最大立铣能力	End milling capacity	20mm
工作台尺寸	Table size	700x180mm
T型槽尺寸	T-slot	14mm
工作台行程 (X, Y行程)	Table travel (X-, Y-Axis)	410, 205mm
主轴箱头升降行程	Head travel (Z-Axis)	310mm
主轴行程	Spindle stroke	85mm
主轴锥度	Spindle taper	MT3
主轴轴心到立柱导轨距离	Max. Spindle to Column	203mm
立轴端到工作台面距离	Max. Spindle to Table	445mm
主轴箱左右倾斜角度	Head tilt	45°
主轴转速 (级数)	Spindle speeds (Grade)	95~1420rpm (6)
电机功率	Motor Power	750W
外形尺寸	Overall dimensions	1000x800x1200mm
净重	N.W.	205KG

产品外形尺寸为手工测量，存在较小误差，为正常情况，具体以实物为准。  
The dimensions of the product are measured manually, and there is a small error, which is normal, and the actual product shall prevail.