
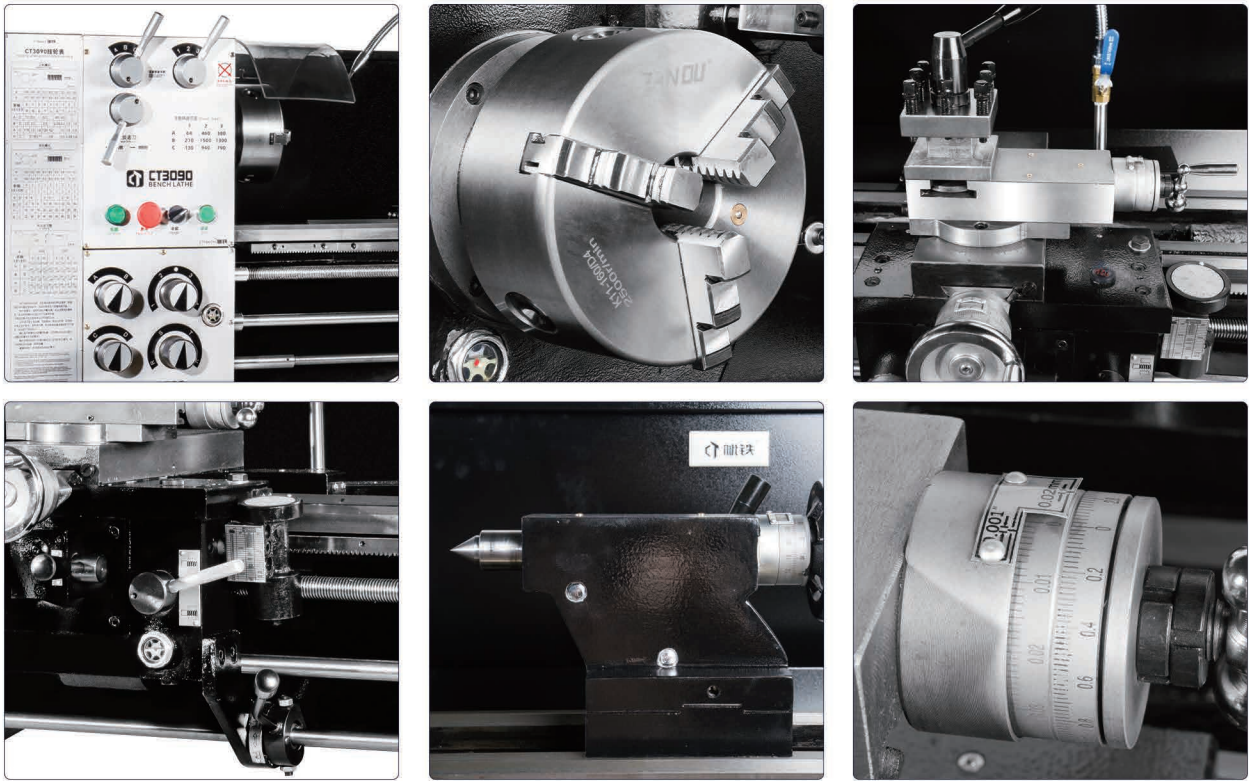


工业级轻型马鞍车床

工业级小型三杆车床，凸轮锁紧卡盘，高精度主轴，940两顶尖距，加工尺寸大。  
通过齿轮变速，可获得9种转速，全钢淬火磨齿传动经久耐磨，超长使用寿命。  
横纵向自动走刀，车削螺纹更方便，无需更换齿轮，即可车多种公英制螺纹。  
1.5KW大功率主轴交流电机，性能佳，效率高。  
双V型淬火导轨，耐磨，平稳，精度高。  
本机可加装光栅数显尺，提高工作效率。

Industrial grade light saddle lathe

Industrial grade small three-bar lathe, CAM locking chuck, high precision spindle, 940 two center distance, large processing size.  
Through the gear change, can get 9 kinds of speed, all steel hardening gear drive wear resistance, long service life.  
Transverse and longitudinal automatic cutting tool, more convenient thread turning, no need to change the gear, you can turn a variety of male inch threads.  
1.5KW high power spindle AC motor, good performance, high efficiency.  
Double V hardening guide rail, wear-resistant, stable, high precision.  
The machine can be equipped with grating digital scale to improve work efficiency.

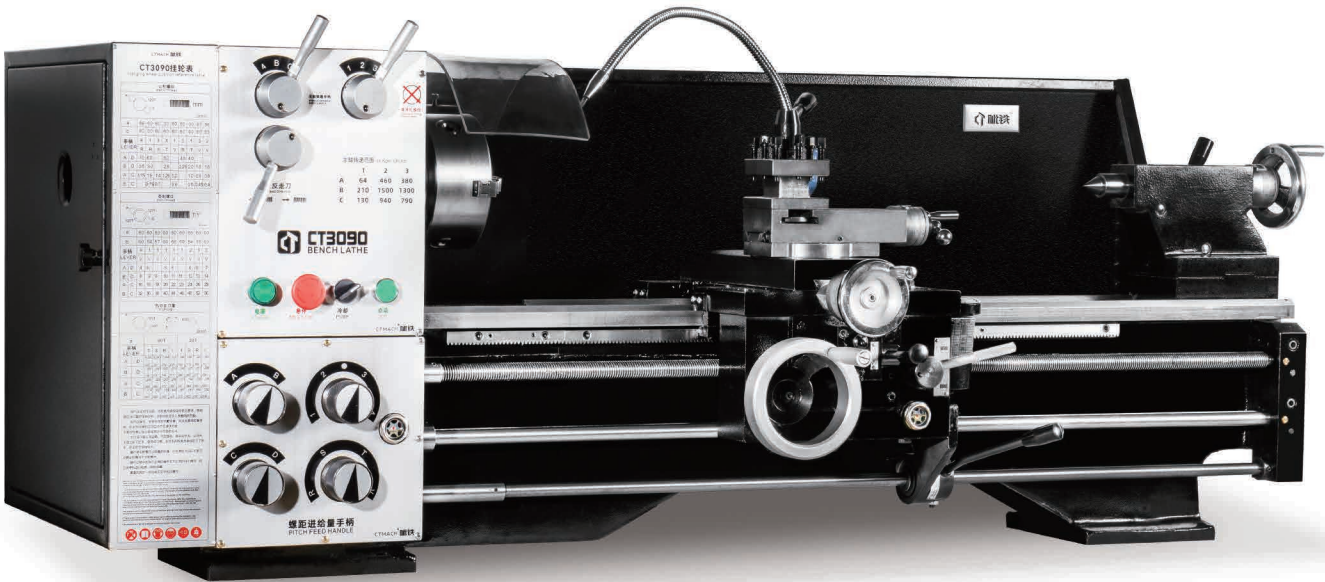

型号	Model	CT3090
床身回转直径	Swing over bed	305mm
马鞍上回转直径	Swing over gap	440mm
中拖板回转直径	Swing over cross slide	173mm
两顶尖距离	Distance between Centres	940mm
床身（长x宽）	Bed（LxW）	1473x182mm
主轴孔锥度	Spindle taper	MT5
主轴通孔直径	Spindle bore	38mm
尾座套筒行程	Tailstock ram travel	100mm
尾座套筒锥度	Tailstock taper	MT3
溜板箱行程	Large carriage travel	850mm
中拖板行程	Cross slide travel	150mm
刀架拖板行程	Top slide travel	90mm
公制螺纹	Metric threads	26 0.4~7mm
英制螺纹	Inch threads	34 4~56.T.P.I
主轴转速	Spindle speeds	9 64-1500rpm
丝杆直径	screw diameter	22mm
进给杆直径	feed rod diameter	19mm
丝杆螺纹牙距(英制/公制)	Lead screw pitch	8T.P.I / 3mm
噪音	Noise	<83 d B
电机功率	Motor power	1.5KW
净重	N.W.	390KG
外形尺寸	Overall dimensions	1600x700x600mm

产品外形尺寸为手工测量，存在较小误差，为正常情况，具体以实物为准。  
The dimensions of the product are measured manually, and there is a small error, which is normal, and the actual product shall prevail.