


工业级重型车床

- 1、1000mm两顶尖距，51mm主轴大通孔，355mm床身回转直径。
- 2、主轴箱采用高强度淬火磨齿齿轮，经久耐用。
- 3、无级变速，2挡齿轮变速，可选择高转速或高扭矩。
- 4、机床带有冷却系统和工作灯。
- 5、双V型高频淬火导轨，耐磨、平稳，精度高。
- 6、机床工作柜带有脚刹装置。

Industrial heavy duty lathe

- 1, 1000mm two center distance, 51mm main shaft chase hole, 355mm bed rotation diameter.
- 2, the spindle box adopts high strength quenching grinding gear, durable.
- 3, stepless speed change, 2 gear change, can choose high speed or high torque.
- 4. The machine tool is equipped with cooling system and working light.
- 5, double V type high-frequency quenching guide rail, wear-resistant, stable, high precision.
- 6, machine tool working cabinet with foot brake device.

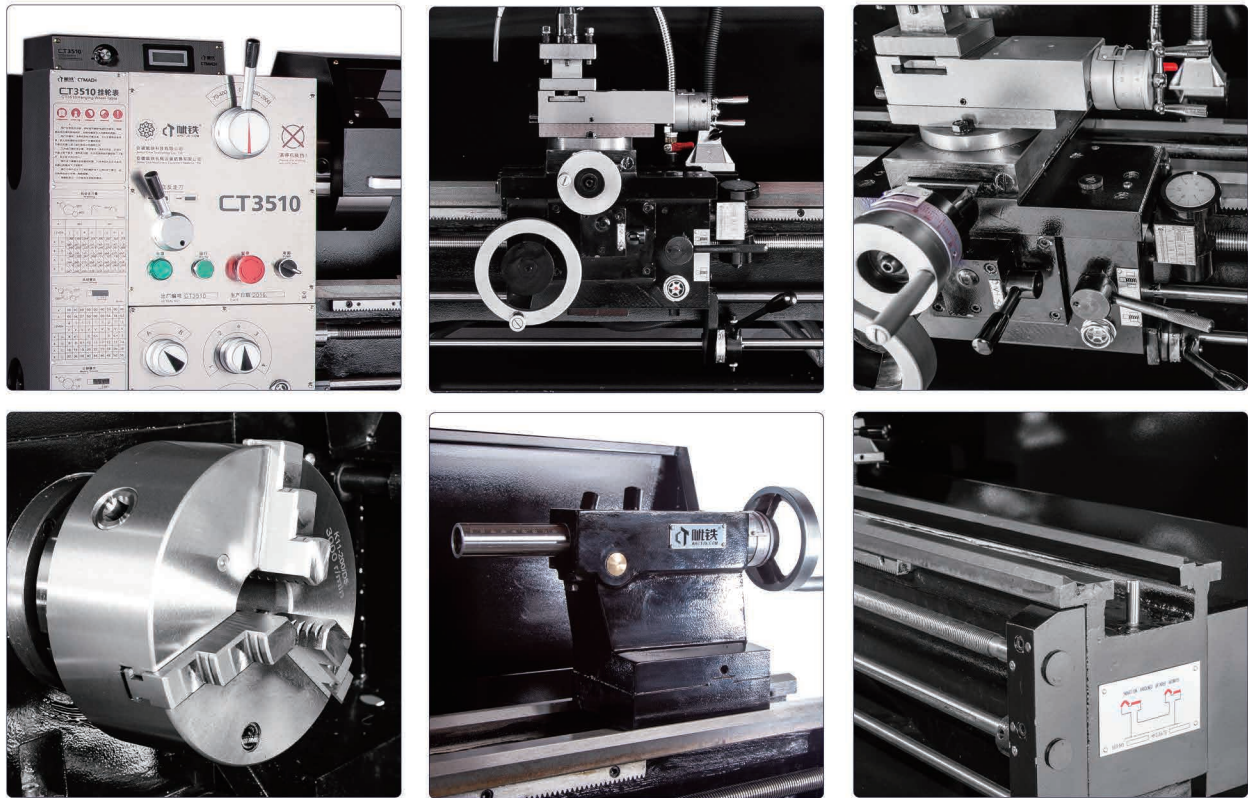

型号	Model	CT3510
床身回转直径	Swing over bed	355mm
马鞍内回转直径	Swing over gap	500mm
中拖板回转直径	Swing over cross slide	220mm
两顶尖距离	Distance between centers	1000mm
顶针中心高	Center height of thimble	186mm
马鞍长度	Length of lathe saddle	204mm
主轴孔锥度	Spindle taper	MT5
主轴通孔直径	Spindle bore	51mm
主轴端部	Spindle end	D1-4
尾座套筒行程	Tailstock ram travel	95mm
尾座套筒锥度	Tailstock taper	MT3
大拖板行程	Large carriage travel	160mm
刀架拖板行程	Top slide travel	68mm
公制螺纹	Metric threads	0.4~7.0mm (26)
英制螺纹	Inch threads	4~56T.P.I (34)
主轴转速 (无级调速)	Spindle speeds (Variable)	70~2000r/min
床身宽度	Width of bed	187mm
电机功率	Motor power	1.5KW
净重	N.W.	510KG
外形尺寸	Overall dimensions	1900x700x1350mm

产品外形尺寸为手工测量，存在较小误差，为正常情况，具体以实物为准。  
The dimensions of the product are measured manually, and there is a small error, which is normal, and the actual product shall prevail.