
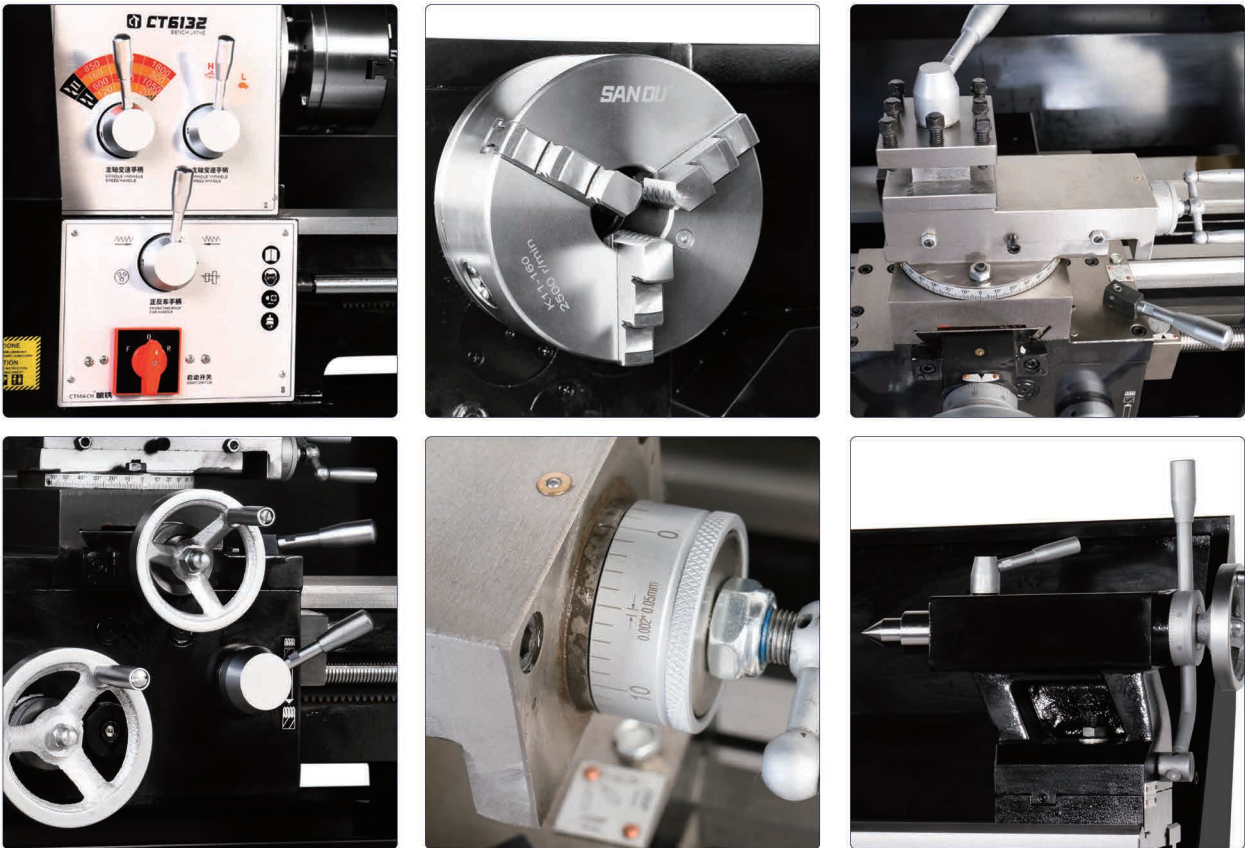


工业级的规格，紧凑外形

- 1、工业级家用机床，精度高，刚性好，扭力大，操作维护简单。
- 2、600mm两顶尖距，38mm主轴大通孔，320mm床身回转直径。
- 3、采用进口SKF轴承，机器运行更平稳，运行时间更长，在最严苛条件下减少轴承疲劳。
- 4、高强度淬火磨齿齿轮，12档齿轮变速，经久耐用。
- 4、床身导轨高频淬火和精密磨削，耐磨、精度高；
- 5、该车床的尺寸使其适合家庭车间、轻工业或教育用途。

Industrial class specification, compact form factor

- 1, industrial household machine tools, high precision, good rigidity, large torque, simple operation and maintenance.
- 2, 600mm two center distance, 38mm spindle chase hole, 320mm bed rotation diameter.
- 3, using imported SKF bearings, the machine runs more smoothly, the operation time is longer, and the bearing fatigue is reduced under the most severe conditions.
- 4, high strength hardening gear, 12 gear change, durable.
- 4. High-frequency quenching and precision grinding of bed guide rail, wear-resistant, high precision;
- 5, the size of the lathe makes it suitable for home workshops, light industry or educational use.

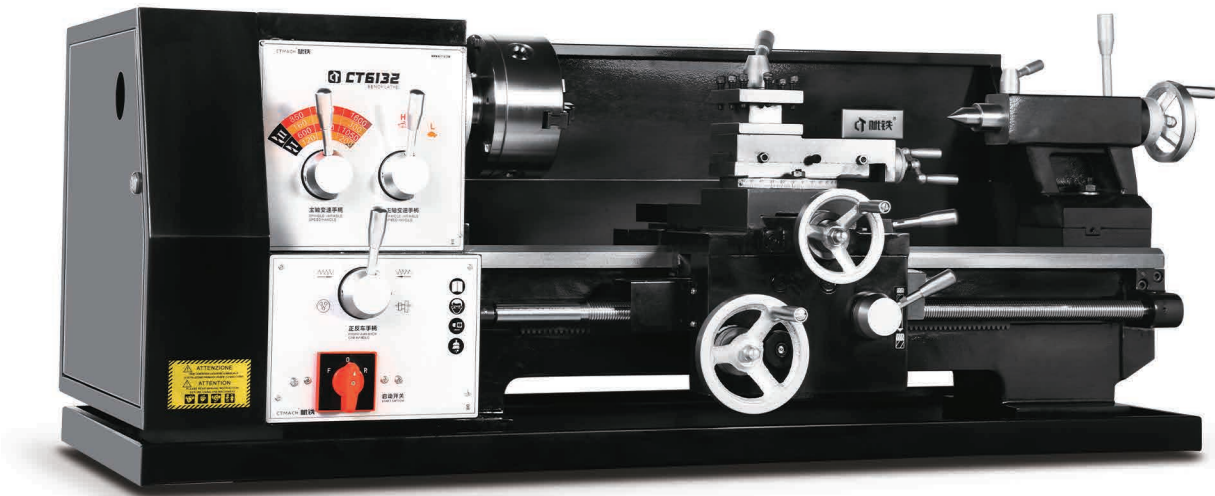

型号	Model	CT6132
床身回转直径	Swing over bed	320mm
中拖板回转直径	Swing over cross slide	210mm
两顶针距	Distance between Centres	600mm
主轴孔锥度	Spindle taper	MT5
主轴通孔直径	Spindle bore	38mm
尾座套筒行程	Tailstock ram travel	70mm
尾座套筒锥度	Tailstock taper	MT3
中拖板行程	Cross slide travel	170mm
刀架拖板行程	Top slide travel	100mm
公制螺纹	Metric thread	0.5~4mm (17)
英制螺纹	Inch thread	9~40T.P.I (20)
横向进刀量	Range of Corss Feed	0.025~0.34mm/r
纵向进刀量	Range of Longitudinal Feed	0.135~1.80mm/r
主轴转速	Spindle speeds	60~1600r/min (12)
电机功率	Motor power	1100W
净重	N.W.	240KG
外形尺寸	Overall dimensions	1220x660x450mm

产品外形尺寸为手工测量，存在较小误差，为正常情况，具体以实物为准。
The dimensions of the product are measured manually, and there is a small error, which is normal, and the actual product shall prevail.