

工业级家用钻铣床

Industrial domestic drilling and milling machines

高精度稳定铣削  
 高强度轻松钻孔  
 限位自动反转攻丝


SKF 采用进口SKF轴承，提高使用寿命和精度。

主轴箱头可升降，可左右倾斜90°。  
 三轴采用燕尾导轨，配可调节锥度镶条，耐磨损，可重载  
 面接触、刚性好。  
 主轴6挡齿轮变速，最高可达到1250RPM。

High-precision and stable milling  
 High strength and easy drilling  
 Limit automatic reverse tapping  
 Imported SKF bearings are used to improve service life and accuracy.  
 The head of the spindle head can be raised and lowered, and can be tilted 90° left and right.  
 Three axes adopt dovetail guide rails with adjustable taper inserts, which are wear-resistant and can be heavy-duty  
 Surface contact, good rigidity.  
 The main shaft has 6-speed gear shifting, which can reach up to 1250RPM.



广泛用于工厂、维修店铺、学校、科创中心及科研单位教学演示使用，适合家用DIY，航模零件、钟表零件加工；  
 可加工钛、不锈钢、45号钢、铁、铝、铜等各类有色金属和木材、尼龙等各类软材料。  
 Widely used in factories, maintenance shops, schools, science and technology innovation centers and scientific research units teaching demonstration use,  
 suitable for household DIY, model airplane parts, clock parts processing;  
 Can process titanium, stainless steel, 45 steel, iron, aluminum, copper and other non-ferrous metals and wood, nylon and other soft materials.

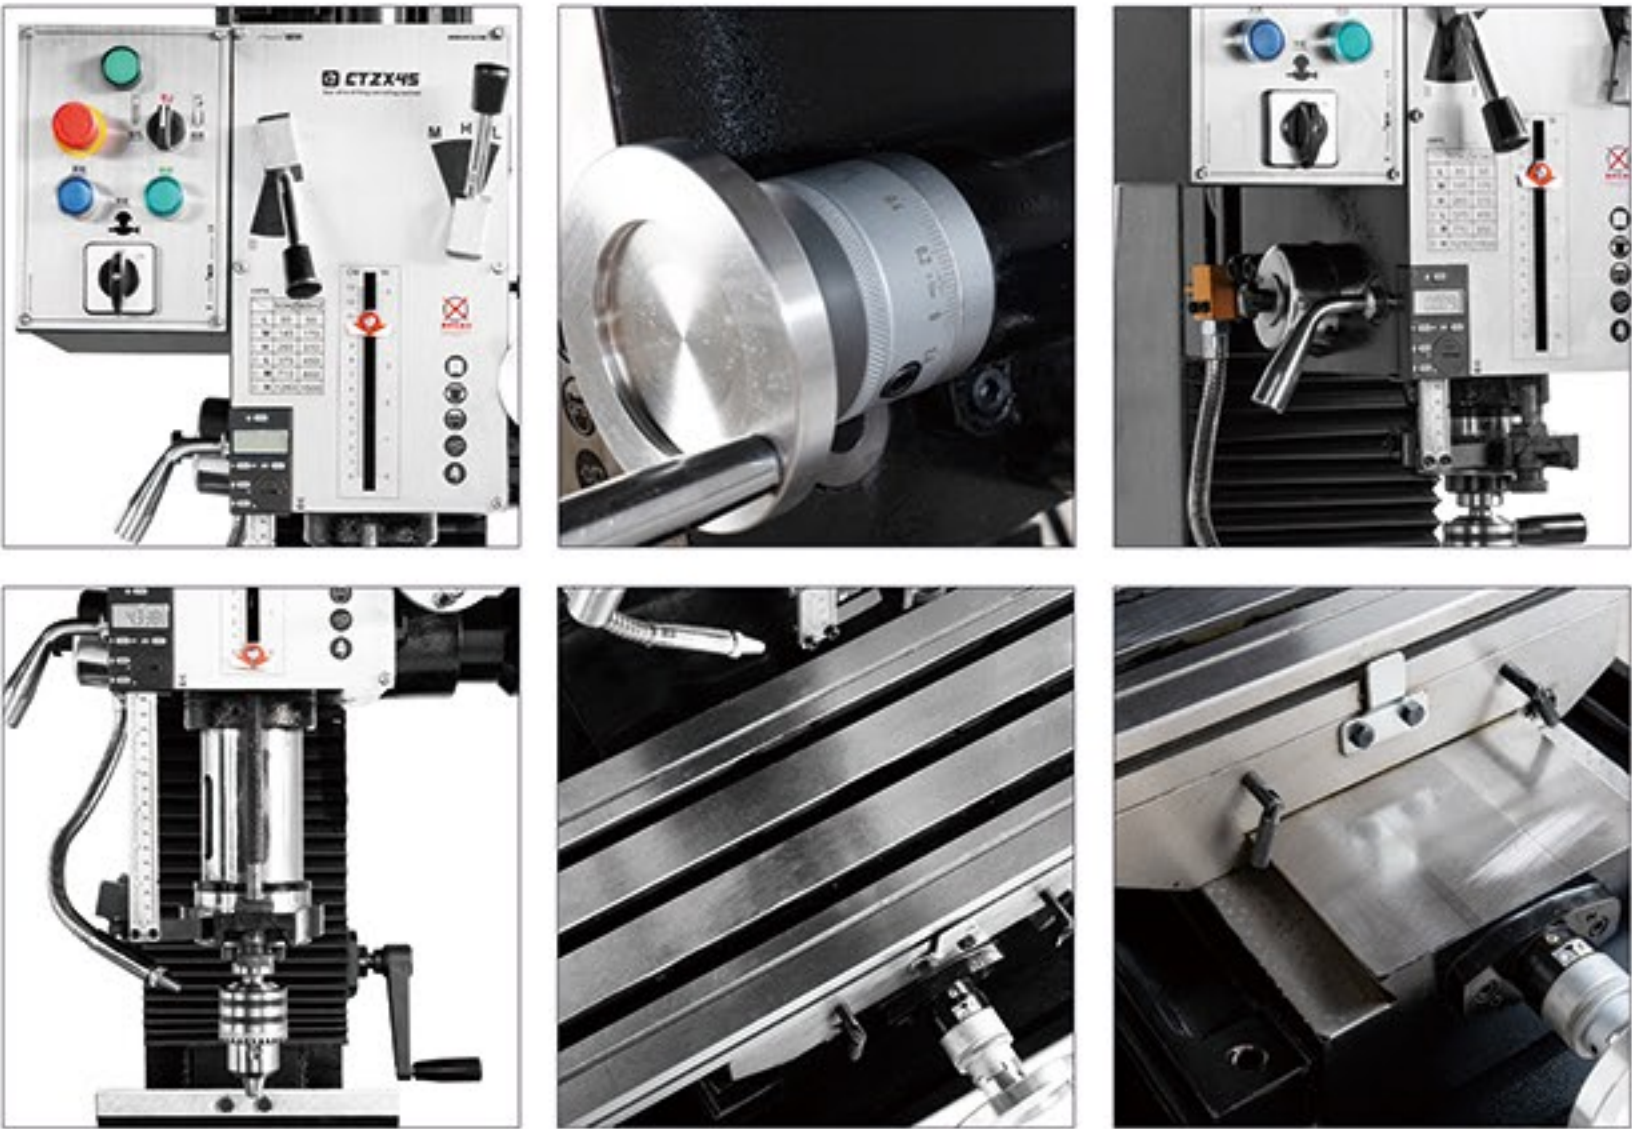

型号	Model	CTZX45
最大钻孔直径	Drilling diameter	45mm
最大面铣能力	Face milling capacity	80mm
最大立铣能力	End milling capacity	32mm
最大攻丝能力	Tapping capacity	M30
工作台尺寸	Table size	800x240mm
T型槽尺寸	T-slot	16mm
工作台行程 (X, Y行程)	Table travel (X-, Y-Axis)	580, 200mm
主轴行程	Spindle stroke	130mm
主轴锥度	Spindle taper	MT4
主轴轴心到立柱导轨距离	Max. Spindle to Column	260mm
立轴端到工作台面距离	Max. Spindle to Table	450mm
主轴箱左右倾斜角度	Head tilt	±90°
主轴转速 (级数)	Spindle speeds (Grade)	80~1250rpm (6)
电机功率	Motor Power	1500W
外形尺寸	Overall dimensions	845x910x1020mm
净重	N.W.	325KG

产品外形尺寸为手工测量，存在较小误差，为正常情况，具体以实物为准。  
 The dimensions of the product are measured manually, and there is a small error, which is normal, and the actual product shall prevail.