
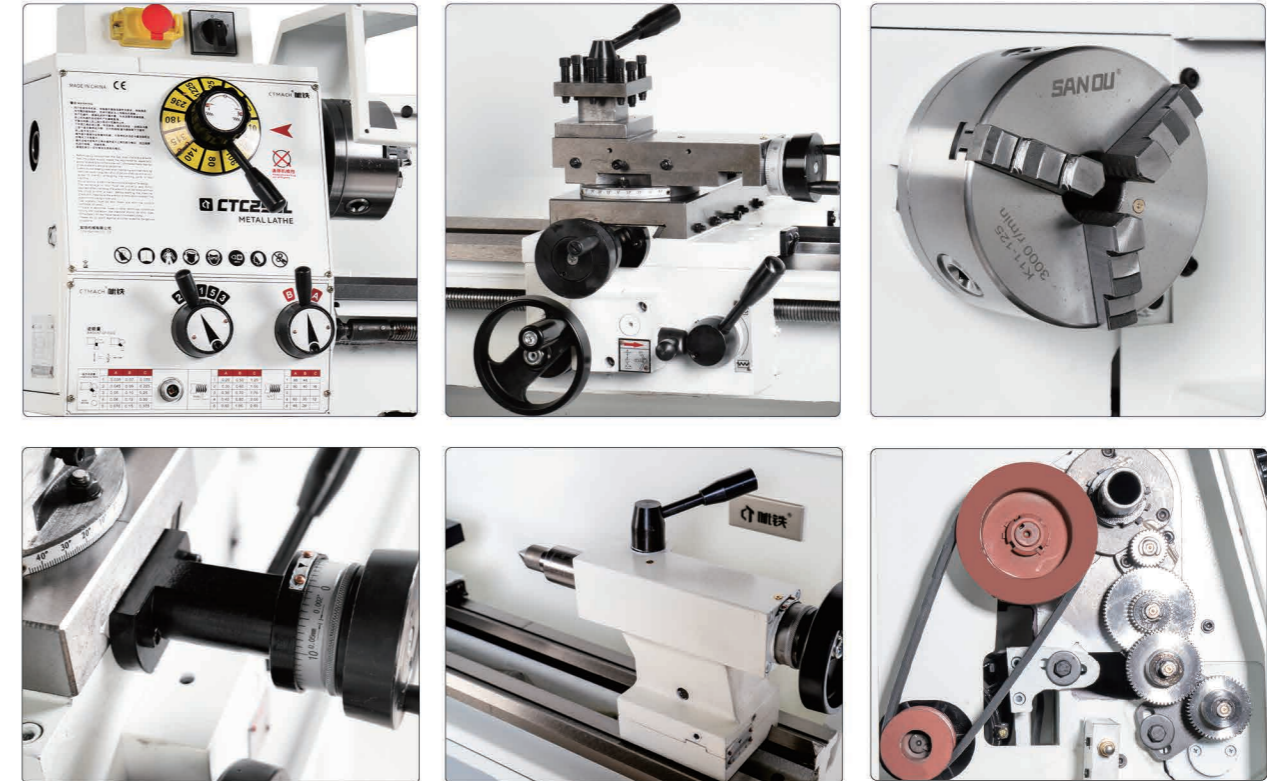


台式车床

- 1、齿轮变速循环档，刚性强、精度高、耐用、易维护。
- 2、双面曲线盘式主轴变速机构，12挡位变速。
- 3、纵横向自动进给，车螺纹无需更换挂轮，即可车削多种螺纹，方便、高效；
- 4、双V形淬火导轨，稳定，精度高。
- 5、丝杆半防护罩，加工过程中，有效避免废屑进入丝杆，影响机床寿命。
- 6、CE标准的断电护罩，打开保护罩自动断电，安全可靠。

Household desktop small lathe

- 1, gear change cycle, strong rigidity, high precision, durable, easy to maintain.
- 2, double-sided curved disk spindle speed change mechanism, 12 gear change.
- 3, vertical and horizontal automatic feed, screw thread without replacing the hanging wheel, you can turn a variety of threads, convenient and efficient;
- 4, double V-shaped hardening guide rail, stable, high precision.
- 5, screw half shield, during the processing, effectively avoid waste into the screw, affecting the life of the machine.
- 6, CE standard power protection cover, open the protective cover automatic power off, safe and reliable.

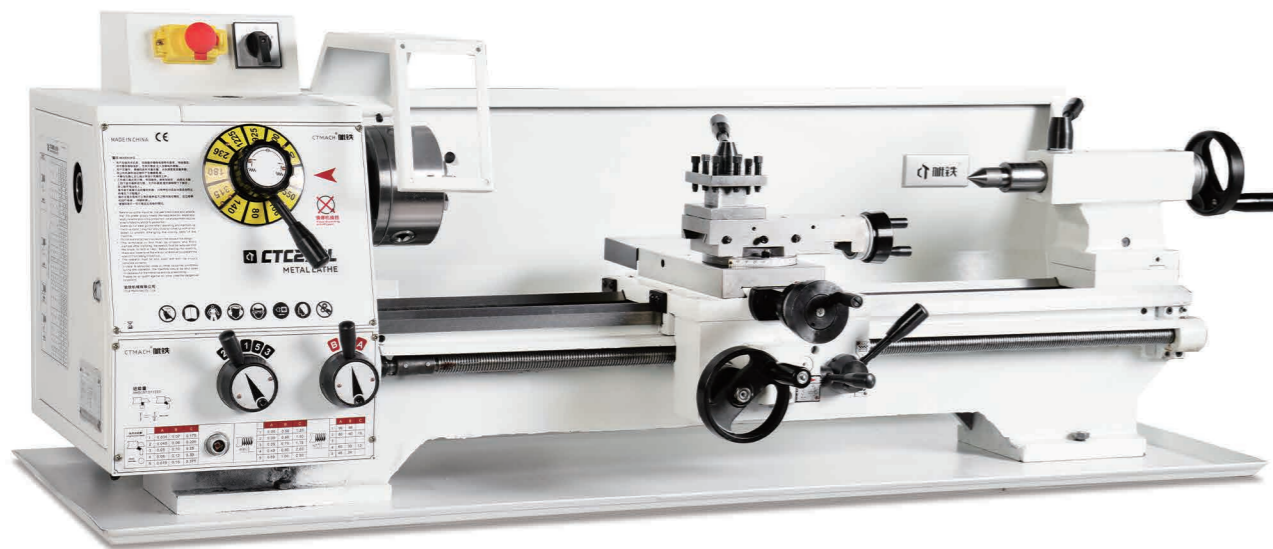

| 型号 | Model | CTC250 | CTC250L |
|---------|--------------------------|----------------|------------------|
| 床身回转直径 | Swing over bed | | 250mm |
| 中拖板回转直径 | Swing over cross slide | | 150mm |
| 两顶尖距离 | Distance between centers | 500mm | 700mm |
| 主轴孔锥度 | Spindle taper | | MT4 |
| 主轴通孔直径 | Spindle bore | | 26mm |
| 尾座套筒行程 | Tailstock ram travel | | 70mm |
| 尾座套筒锥度 | Tailstock taper | | MT3 |
| 中拖板行程 | Cross slide travel | | 130mm |
| 刀架拖板行程 | Top slide travel | | 75mm |
| 公制螺纹 | Metric threads | | 15 0.25~2.5mm |
| 英制螺纹 | Inch threads | | 10 12~96TPI |
| 纵向走刀进给量 | Longitudinal feed | | 15 0.035~0.375mm |
| 横向走刀进给量 | Lateral feeds | | 15 0.015~0.187mm |
| 主轴转速级数 | Number of spindle speeds | | 12 |
| 主轴转速 | Spindle speeds | | 80~1600rpm |
| 电机功率 | Motor power | | 750w |
| 净重 | N.W. | 163Kg | 185Kg |
| 外形尺寸 | Overall dimensions | 1100x570x485mm | 1300x570x485mm |

产品外形尺寸为手工测量，存在较小误差，为正常情况，具体以实物为准。
The dimensions of the product are measured manually, and there is a small error, which is normal, and the actual product shall prevail.