

CE标准, 宽大钻铣工作台, 木工金属两用, 横纵向自动/手动进给。

钻铣头可升降可旋转360°, 调节皮带位置, 可获得不同转速;



车钻铣三合一多功能机床用途广泛, 主要用于各种回转体零件的外圆、内孔、端面、锥度、切槽及公英制螺纹加工, 此外还可以用来进行钻孔、铣槽, 铣面等平面加工。

CE standard, large drilling and milling worktable, dual-purpose for woodworking and metal, automatic/manual feed in horizontal and vertical directions.

The drilling and milling head can be lifted and rotated 360°, and the position of the belt can be adjusted to obtain different speeds;

The three-in-one multi-function machine tool for turning, drilling and milling is widely used, mainly used for the outer circle, inner hole, end face, taper, grooving and cutting of various rotary parts.


Metric and inch thread processing, and can also be used for drilling, slot milling, surface milling and other plane processing.

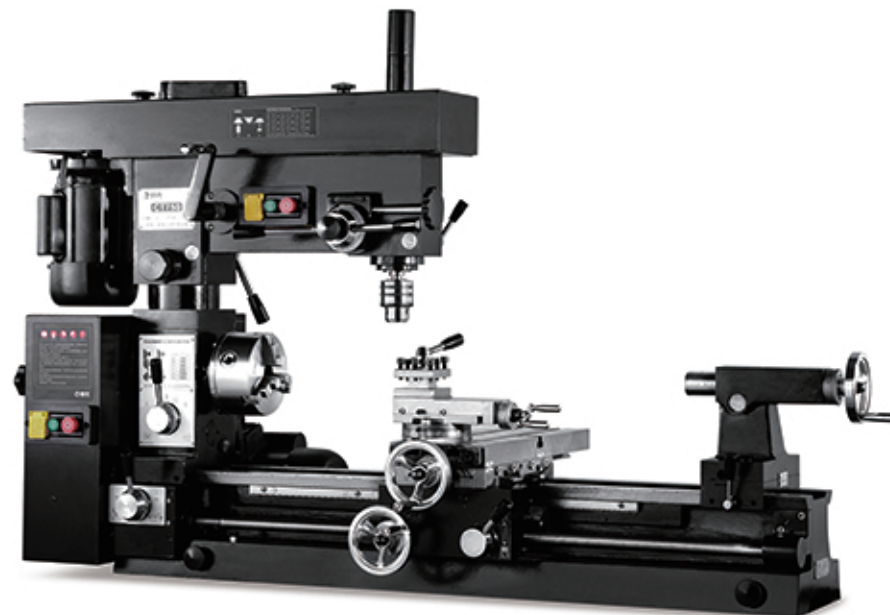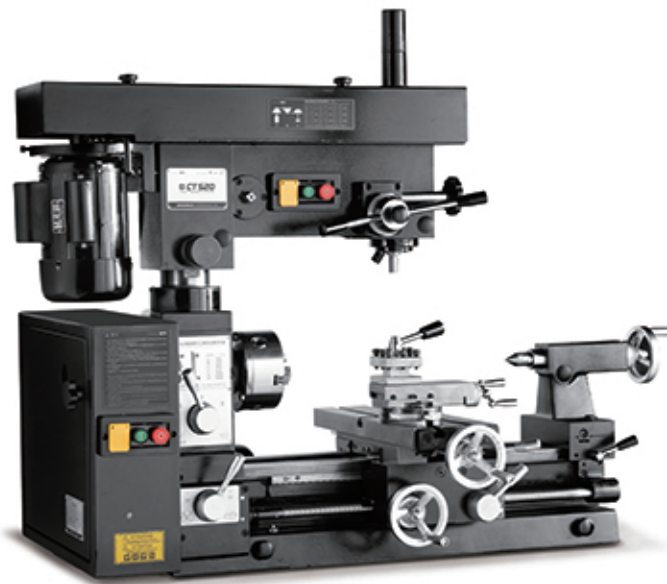

工厂维修店铺, 学校、科创中心及科研单位教学演示使用, 适合家用DIY, 航模零件、钟表零件加工;
可加工钛、不锈钢、45号钢、铁、铝、铜等各类有色金属和木材、尼龙等各类软材料。

For teaching demonstrations in schools, science and innovation centers and scientific research units, Suitable for home DIY, model aircraft parts, clock parts processing.

It can process various non-ferrous metals such as titanium, stainless steel, 45# steel, iron, aluminum, copper and other soft materials such as wood and nylon.

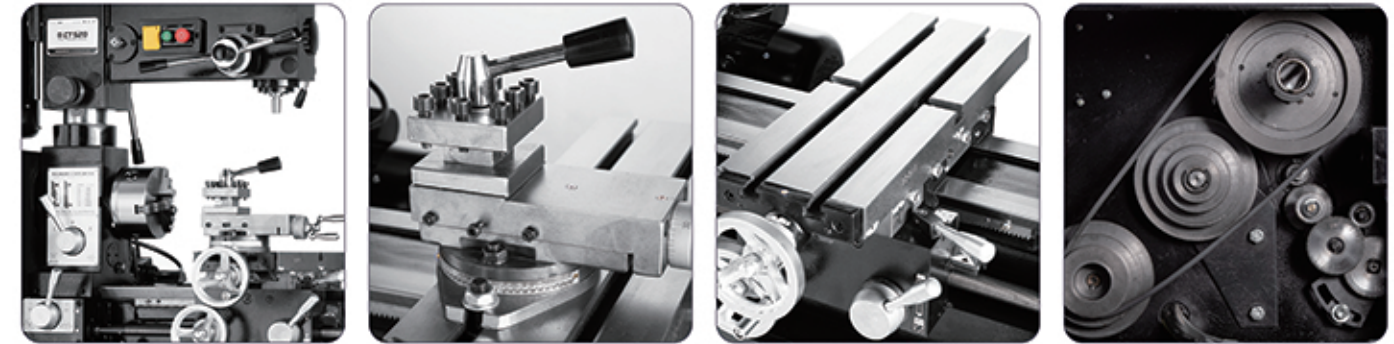

型号	Model	CT520	CT750
车削	Turning		
床身回转直径	Swing over bed	300mm	
中拖板回转直径	Swing over cross slide	140mm	
两顶尖距	Distance between Centres	500mm	750mm
主轴孔锥度	Spindle taper	MT4	
主轴通孔直径	Spindle bore	26mm	
尾座套筒行程	Tailstock ram travel	50mm	
尾座套筒锥度	Tailstock taper	MT3	
中拖板横向行程	Cross slide travel	200mm	
刀架拖板行程	Top slide travel	80mm	
公制螺纹 (种数)	Metric threads (Grade)	0.5~3mm (14)	
英制螺纹 (种数)	Inch threads (Grade)	11~40 1/n" (20)	
横向进刀量 (级数)	Range of Corss Feed (Grade)	0.05~0.5mm (20)	
纵向进刀量 (级数)	Range of Longitudinal Feed (Grade)	0.05~0.5mm (20)	
主轴转速 (级数)	Spindle speeds (Grade)	160~1600r/min (6)	
电机功率	Motor power	750W	
钻铣	Drilling and milling		
最大钻孔直径	Drilling diameter	20mm	
最大立铣能力	End Milling Capacity	16mm	
工作台尺寸	Table size	425x150mm	
T型槽尺寸	T-slots size	12mm	
主轴锥度	Spindle taper	MT3	
主轴行程	Spindle stroke	80mm	
主轴轴心到立柱导轨距离	Max. Spindle to Column	310mm	
主轴端至工作台面最大距离	Max. Spindle to Table	240~320mm	
主轴转速 (级数)	Spindle speeds (Grade)	315~2000r/min (9)	
钻铣头箱绕立柱回转角度	Head Rotation	360°	
钻铣头箱垂直升降行程	Vertical head travel	80mm	
电机功率	Motor power	550W	
其他	Other		
净重	N.W.	240KG	280KG
外形尺寸	Overall dimensions	1250x570x980mm	1450x570x980mm

产品外形尺寸为手工测量, 存在较小误差, 为正常情况, 具体以实物为准。

The dimensions of the product are measured manually, and there is a small error, which is normal, and the actual product shall prevail.