家用型台式小车床

Household desktop small lathe

140KG 占地面积小,应用场所广。

与ドア。 采用进口SKF轴承,提高使用寿命和精度。

皮带传动, 声音轻, 更换皮带位置可获高低速, 无级调速, 低速50~1250rpm, 高速100~2500rpm。

纵向自动走刀,走刀进给量: 0.07、0.4mm/u 更换齿轮, 可车削多种公英制螺纹多。

双V形淬火导轨,采用燕尾式导轨,内置锥度镶条,可调节, 耐磨损、可重载、面接触、刚性好,精度高。 CE标准的断电护罩、打开保护罩自动断电、安全可靠。


The whole machine is 140KG, occupies a small area and has a wide range of applications. Imported SKF bearings are used to improve service life and accuracy. Belt drive, low sound, high and low speed can be obtained by changing the belt position,

Stepless speed regulation, low speed 50~1250rpm, high speed 100~2500rpm. Longitudinal automatic cutting, cutting feed: 0.07, 0.4mm/u

Replacing gears can turn a variety of metric and inch threads. Double V-shaped hardened rails with dovetail rails, built-in tapered inserts, adjustable,

Wear resistance, heavy load, surface contact, good rigidity and high precision.

CE standard power-off guard, open the guard to automatically cut off the power, safe and reliable.

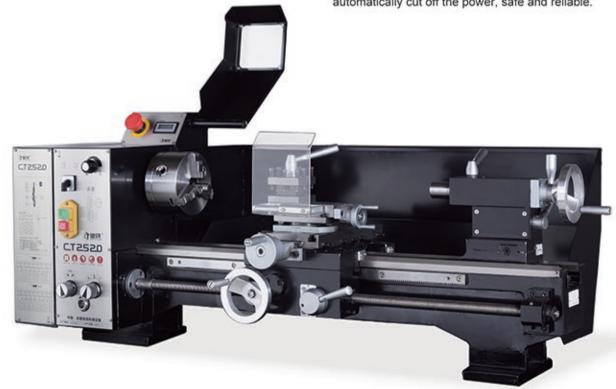


学校、科创中心及科研单位教学演示使用,适合家用DIY, 航模零件、钟表零件加工; 可加工钛、不锈钢、45号钢、铁、铝、铜等各类有色金属和木材、尼龙等各类软材料。


For teaching demonstrations in schools, science and innovation centers and scientific research units, Suitable for home DIY, model aircraft parts, clock parts processing.

It can process various non-ferrous metals such as titanium, stainless steel, 45# steel, iron, aluminum, copper and other soft materials such as wood and







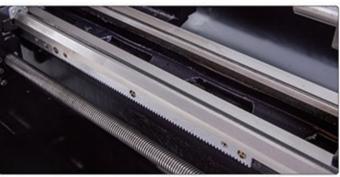



型号	Model	CT2520
床身回转直径	Swing over bed	250mm
中拖板回转直径	Swing over cross slide	150mm
两顶尖距离	Distance between centers	550mm
主轴孔锥度	Spindle taper	MT4
主轴通孔直径	Spindle bore	26mm
尾座套筒行程	Tailstock ram travel	70mm
尾座套筒锥度	Tailstock taper	MT2
中拖板横向行程	Cross slide travel	120mm
刀架小拖板行程	Top slide travel	70mm
公制螺纹	Metric threads	0.2~4.0mm
英制螺纹	Inch threads	8~56TPI
纵向走刀进给量	Range of Longitudinal Feed	0.07、0.4 mm/u
主轴转速范围(无级变速)	Spindle speeds (Variable)	50~2500RPM
电机功率	Motor power	1.1KW
净重	N.W.	140KG
外形尺寸	Overall dimensions	1100x600x450mm

产品外形尺寸为手工测量,存在较小误差,为正常情况,具体以实物为准。

The dimensions of the product are measured manually, and there is a small error, which is normal, and the actual product shall prevail.

WWW.AHCTJX.COM WWW.AHCTJX.COM